

SUBSTITUTE FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER  
11033-064001**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)

09/831331

INTERNATIONAL APPLICATION NO.  
PCT/GB00/03441INTERNATIONAL FILING DATE  
7 September 2000PRIORITY DATE CLAIMED  
8 September 1999TITLE OF INVENTION  
METHOD OF PRINTINGAPPLICANT(S) FOR DO/EO/US  
Alan Coull

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 to 16 below concern other documents or information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

☐  
☐  
☐  
☐  
☐
**CERTIFICATE OF MAILING BY EXPRESS MAIL**Express Mail Label No EL694850645US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231


Date of Deposit

5/08/01

Signature

*Josh Cronin*Typed Name of  
Person Signing

Josh Cronin

U.S. APPLICATION NO. (IF KNOWN) <b>09/831331</b>		INTERNATIONAL APPLICATION NO. PCT/GB00/03441		ATTORNEY'S DOCKET NUMBER 11033-064001	
17. <input checked="" type="checkbox"/> The following fees are submitted:  <b>Basic National Fee ( 37 CFR 1.492(a)(1)-( 5) ):</b>  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1000</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710</b>  International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690</b>  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS</b> PTO USE ONLY	
Surcharge of <b>\$130</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
Claims		Number Filed	Number Extra	Rate	
Total Claims		19 - 20 =	0	x \$18	\$0.00
Independent Claims		3- 3 =	0	x \$80	\$0.00
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)				+ \$270	\$0.00
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$860.00</b>	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
<b>SUBTOTAL =</b>				<b>\$860.00</b>	
Processing fee of <b>\$130</b> for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
<b>TOTAL NATIONAL FEE =</b>				<b>\$860.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$0.00	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$860.00</b>	
				<b>Amount to be refunded:</b> \$	
				<b>Charged:</b> \$	
a. <input checked="" type="checkbox"/> A check in the amount of \$860.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO:					
Tu N. Nguyen FISH & RICHARDSON P.C. 225 Franklin Street Boston, MA 02110-2804 (617) 542-5070 phone (617) 542-8906 facsimile			SIGNATURE:   NAME: Tu N. Nguyen  REGISTRATION NUMBER: 42,934		

09/831331

Attorney's Docket No.: 11033-064001

JC08 Rec'd PCT/PTO 0 8 MAY 2001

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Alan Coull  
Serial No. : Unassigned  
Filed : Herewith  
Title : METHOD OF PRINTING

Art Unit : Unknown  
Examiner : Unknown

**Box PCT**

Commissioner for Patents  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Prior to examination, please amend the application as follows:

In the claims:

Cancel claims 14, 15, 18, 20 and 21.

Amend claims 2-11, 13, 16, 17 and 19 as follows:

2. (Amended) A method according to claim 1 wherein the printing apparatus is mounted on a carriage and the method includes continuously moving the carriage transversely across the lanes, relative to a base structure relative to which each of the articles of the set is held stationary during printing.

3. (Amended) A method according to claim 2 wherein the carriage is moved transversely of the lanes at a generally constant speed.

## CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL694850645US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231.

May 8, 2001

Date of Deposit

Signature

Typed or Printed Name of Person Signing Certificate

*John B. Cronin*  
*Joshua Cronin*

4. (Amended) A method according to claim 1 wherein all of the articles of the set positioned at the printing station simultaneously whilst the printing apparatus is moved transversely across all the lanes.

5. (Amended) A method according to claim 1 wherein the articles are conveyed severally in their respective lanes, to the printing station, and are arranged to be present at the printing station so that the printing apparatus may be moved into registry with the articles and printing performed, whilst the printing apparatus is continuously moved.

6. (Amended) A method according to claim 1 wherein the printing apparatus includes a housing mounted on the carriage, and print head movement to and from the printing position is relative to the housing of the printing apparatus.

7. (Amended) A method according to any claim 1 wherein the print head is of the kind having a plurality of printing elements which are selectively actuated during printing by a control means to effect printing of desired information on each of the articles.

8. (Amended) A method according to claim 1 wherein the printing apparatus is a thermal printer in which there are printing elements arranged in a generally linear array along the print head with the array extending generally transversely to the direction of movement of the printing apparatus across the lanes, the method including selectively energising the printing elements during printing to remove pixels of marking medium from a carrier positioned between the printing elements and the article.

9. (Amended) A method according to claim 8 wherein the method includes moving the carrier relative to the print head as the printing apparatus moves transversely of the lanes of articles during printing, so as that fresh carrier is continually be positioned between the print head and the article on which information is being printed.

10. (Amended) A method according to claim 8 wherein the printing apparatus includes a housing within which there is provided a storage spool for unused carrier, a take-up spool for used carrier, a first motive means to move at least the take-up spool to take up used carrier, and a second motive means to move the print head to and from the printing position.

11. (Amended) A method according to claim 1 which includes conveying the articles of the set in their parallel lanes to the printing station, arresting movement of the set of articles at the printing station while the information is printed on each of the articles of the set.

13. (Amended) A method according to claim 12 wherein the method is applied to printing apparatus having a thermal print head having printing elements which are selectively energised during printing to melt and remove pixels of marking medium from the carrier and deposit the pixels of ink on to the articles.

16. (Amended) A printing station for performing the method of claim 1, the printing station including a carriage, a printing apparatus mounted on the carriage, the carriage being moveable to move the printing apparatus transversely of a plurality of lanes whilst the printing apparatus effects printing on each of a plurality of articles at the printing station, each of the articles being located in one of the lanes, the carriage being moveable substantially continuously across the lanes whilst the printing apparatus prints the information on each of the articles of the set in turn without or substantially without stopping.

17. (Amended) A station according to claim wherein the carriage is mounted on a gantry which extends over the lanes and the printing apparatus is moved the lanes on the carriage.

19. (Amended) A station according to claim 16 wherein movement of the carriage is controlled by a controller which co-ordinates printing with carriage movement.

In the abstract:

Replace the abstract with the following version.

--A method of printing information on each article of a set of articles arranged in generally parallel lanes at a printing station, the method including continuously moving a printing apparatus relative to the lanes to bring the printing apparatus into registry with each article of the set in turn, and at each registry position, whilst continuing to move the printing apparatus, moving a print head of the apparatus relative to the respective article to a printing position in which the print head is capable of printing information on the article, continuing to move the printing apparatus relative to the article whilst effecting printing with the print head, and when the information is printed, whilst continuing to move the printing apparatus, moving the print head out of the printing position.--

Applicant : Alan Coull  
Serial No. : Unassigned  
Filed : Herwith  
Page : 5

Attorney's Docket No.: 11033-064001

REMARKS

With the entering of the above amendments, claims 1-13, 16, 17 and 19 are pending.  
Applicant amended claims 2-11, 13, 16, 17 and 19, and canceled claims 14, 15, 18, 20 and 21.  
Applicant also amended the Abstract.

Applicant requests that all pending claims be examined.

Attached is a marked-up version of the changes being made by the current amendment.

Please apply any charges or credits to Deposit Account No. 06-1050.

Respectfully submitted,

Date: May 8, 2001

Tu N. Nguyen

Tu N. Nguyen  
Reg. No. 42,934

Fish & Richardson P.C.  
225 Franklin Street  
Boston, MA 02110-2804  
Telephone: (617) 542-5070  
Facsimile: (617) 542-8906

20257638.doc

**Version with markings to show changes made**

In the claims:

Claims 14, 15, 18, 20 and 21 have been cancelled.

Claims 2-11, 13, 16, 17 and 19 have been amended as follows:

2. (Amended) A method according to claim 1 wherein [characterised in that] the printing apparatus is mounted on a carriage and the method includes continuously moving the carriage transversely across the lanes, relative to a base structure relative to which each of the articles of the set is held stationary during printing.
3. (Amended) A method according to claim 2 wherein [characterised in that] the carriage is moved transversely of the lanes at a generally constant speed.
4. (Amended) A method according to claim 1 wherein [any one of the preceding claims characterised in that] all of the articles of the set positioned at the printing station simultaneously whilst the printing apparatus is moved transversely across all the lanes.
5. (Amended) A method according to claim 1 wherein [any one of claims 1 to 3 characterised in that] the articles are conveyed severally in their respective lanes, to the printing station, and are arranged to be present at the printing station so that the printing apparatus may be moved into registry with the articles and printing performed, whilst the printing apparatus is continuously moved.
6. (Amended) A method according to claim 1 wherein [any one of the preceding claims characterised in that] the printing apparatus includes a housing mounted on the carriage, and print head movement to and from the printing position is relative to the housing of the printing apparatus.

7. (Amended) A method according to claim 1 wherein [any one of the preceding claims characterised in that] the print head is of the kind having a plurality of printing elements which are selectively actuated during printing by a control means to effect printing of desired information on each of the articles.

8. (Amended) A method according to claim 1 wherein [any one of the preceding claims characterised in that] the printing apparatus is a thermal printer in which there are printing elements arranged in a generally linear array along the print head with the array extending generally transversely to the direction of movement of the printing apparatus across the lanes, the method including selectively energising the printing elements during printing to remove pixels of marking medium from a carrier positioned between the printing elements and the article.

9. (Amended) A method according to claim 8 wherein [characterised in that] the method includes moving the carrier relative to the print head as the printing apparatus moves transversely of the lanes of articles during printing, so as that fresh carrier is continually be positioned between the print head and the article on which information is being printed.

10. (Amended) A method according to claim 8 wherein [or claim 9 characterised in that] the printing apparatus includes a housing within which there is provided a storage spool for unused carrier, a take-up spool for used carrier, a first motive means to move at least the take-up spool to take up used carrier, and a second motive means to move the print head to and from the printing position.

11. (Amended) A method according to claim 1 [any one of the preceding claims] which includes conveying the articles of the set in their parallel lanes to the printing station, arresting movement of the set of articles at the printing station while the information is printed on each of the articles of the set.

13. (Amended) A method according to claim 12 wherein [characterised in that] the method is applied to printing apparatus having a thermal print head having printing elements

which are selectively energised during printing to melt and remove pixels of marking medium from the carrier and deposit the pixels of ink on to the articles.

16. (Amended) A printing station for performing the method of claim 1 [any one of the preceding claims], the printing station including a carriage, a printing apparatus[, means to mount the printing apparatus] mounted on the carriage, [means to move] the carriage being moveable to move [and thus] the printing apparatus transversely of a plurality of lanes whilst the printing apparatus effects [and to effect] printing on each of a plurality of articles at the printing station, each of the articles being located in one of the lanes, [characterised in that the means to move] the carriage [is adapted to move the carriage] being moveable substantially continuously across the lanes whilst [and] the printing apparatus [being adapted to print] prints the information on each of the articles of the set in turn without or substantially without stopping.

17. (Amended) A station according to claim 16 wherein [characterised in that] the carriage is mounted on a gantry which extends over [or under] the lanes and the printing apparatus is moved over [or under] the lanes [respectively,] on the carriage.

19. (Amended) A station according to claim 16 wherein [or claim 17 characterised in that] movement of the carriage is controlled by a controller [control means] which co-ordinates printing with carriage movement.

In the abstract:

A method of printing information on each article of a set of articles [(14a to 14e)] arranged in generally parallel lanes [(a to e),] at a printing station [(10)], the method including continuously moving a printing apparatus [(16)] relative to the lanes [(a to e)] to bring the printing apparatus [(16)] into registry with each article of the set [(14a to 14e)] in turn, and at each registry position, whilst continuing to move the printing apparatus [(16)], moving a print head [(26)] of the apparatus [(16)] relative to the respective article [(14a to 14e)] to a printing position in which the print head [(26)] is capable of printing information on the article, continuing to move the printing apparatus [(16)] relative to the article whilst effecting printing

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

with the print head [(26)], and when the information is printed, whilst continuing to move the printing apparatus [(16)], moving the print head [(26)] out of the printing position.

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 March 2001 (15.03.2001)

PCT

(10) International Publication Number  
**WO 01/17791 A1**

(51) International Patent Classification<sup>7</sup>: B41J 13/00, 13/08

(72) Inventor; and

(75) Inventor/Applicant (for US only): COULL, Alan [GB/GB]; 16 Melrose Avenue, Beeston, Nottingham NG9 1HW (GB).

(21) International Application Number: PCT/GB00/03441

(22) International Filing Date:  
7 September 2000 (07.09.2000)

(74) Agent: FORRESTER KETLEY & CO.; Chamberlain House, Paradise Place, Birmingham B3 3HP (GB).

(25) Filing Language: English

(81) Designated State (national): US.

(26) Publication Language: English

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(30) Priority Data:  
9921081.7 8 September 1999 (08.09.1999) GB


Published:

— With international search report.

(71) Applicant (for all designated States except US):  
**MARKEM TECHNOLOGIES LIMITED** [GB/GB];  
Highfields Science Park, University Boulevard, Nottingham NG7 2QN (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF PRINTING

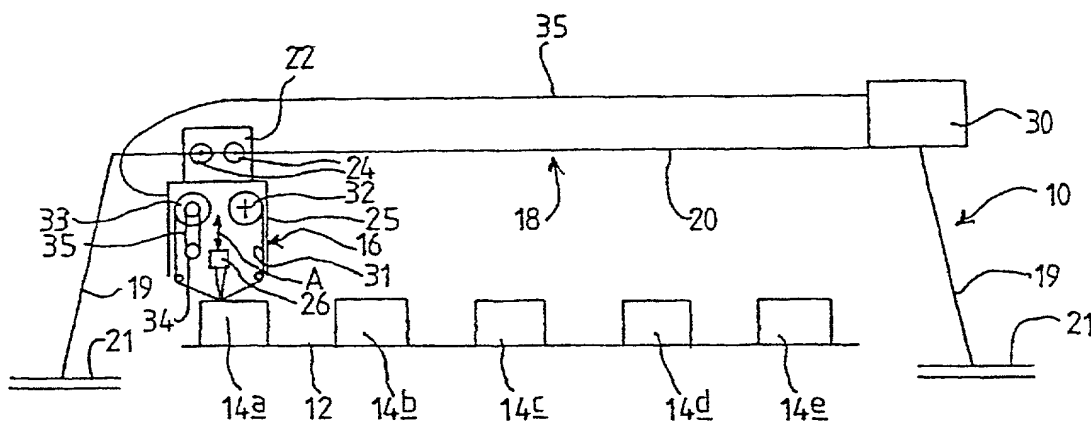

(57) Abstract: A method of printing information on each article of a set of articles (14a to 14e) arranged in generally parallel lanes (a to e), at a printing station (10), the method including continuously moving a printing apparatus (16) relative to the lanes (a to e) to bring the printing apparatus (16) into registry with each article of the set (14a to 14e) in turn, and at each registry position, whilst continuing to move the printing apparatus (16), moving a print head (26) of the apparatus (16) relative to the respective article (14a to 14e) to a printing position in which the print head (26) is capable of printing information on the article, continuing to move the printing apparatus (16) relative to the article whilst effecting printing with the print head (26), and when the information is printed, whilst continuing to move the printing apparatus (16), moving the print head (26) out of the printing position.

Title: Method of Printing

Description of Invention

This invention relates to a method of printing.

It is a requirement to be able to print on each article of a set of articles which are conveyed to a printing station in generally parallel lanes.

For example in a packaging line, a plurality of articles on each of which it is desired to print information, may be conveyed side by side on a conveying means, to a printing station where the information is to be printed.

So called intermittent printers are known in which a print head is moved relative to a stationary substrate whilst printing elements of the print head are actuated to print desired information on the substrate. Such printers may be thermal printers in which pixels of ink are removed from a ribbon as the printing elements are energised, and thus the print head, during printing, moves not only relative to the substrate, but relative to the ribbon too.

By virtue of the need to move the print head relative to the stationary substrate, the length of information which can be printed along the stationary substrate is restricted.

It is known to use an intermittent printer of the type described above, to achieve printing on each article of a set of articles which are conveyed side by side in generally parallel lanes to a printing station where the printer is located. The printer is mounted on a carriage and is bodily conveyed transversely across the lanes. The articles are maintained stationary at the printing station and the printer is conveyed transversely of the lanes to a first position where movement of the printer is stopped, and then printing is effected on a first of the articles by moving the print head within the stationary printing apparatus. The printer is then conveyed transversely of the lanes to a second position where movement of the printer is again stopped, so that printing may be effected on a second article, and so on for all of the articles of the set.

Although intermittent printers are not particularly fragile, the continual stopping and starting of the carriage creates wear and tear on the intermittent printer. The problem is aggravated because of the speed at which it necessary to convey the printer between stops in order to reduce the time between printing on the articles to a minimum. Thus not only is the printer subjected to jolts as the printer stops, but rapid accelerations when the printer is moved between stops. Also, the carriage and its ancillary drive system is subject to wear and tear aggravated by the start/stop motion of the printer.

So called continuous thermal printers are also known in which a print head is held stationary at a printing station and during printing, the substrate and ribbon are moved past the print head, usually together, whilst the printing elements of the print head are selectively energised, to effect printing. The length of print is not restricted as in an intermittent printer because the print head is not moved in the printer, but relative movement between the print head, and the ribbon and substrate, is achieved solely by movement of the ribbon and substrate. Such printers tend to be used where the substrate is a moving web, which can readily be moved together with the ribbon past the print head, whereas intermittent printers are more readily adaptable for printing on other substrates such as articles on a packaging line, because relative movement between the print head, and the ribbon and substrate, is achieved by print head movement.

According to one aspect of the invention we provide a method of printing information on each article of a set of articles arranged in generally parallel lanes, at a printing station, the method including continuously moving a printing apparatus relative to the lanes to bring the printing apparatus into registry with each article of the set in turn, and at each registry position, whilst continuing to move the printing apparatus, moving a print head of the apparatus relative to the respective article to a printing position in which the print head is capable of printing information on the article, continuing to move the printing

apparatus relative to the article whilst effecting printing with the print head, and when the information is printed, whilst continuing to move the printing apparatus, moving the print head out of the printing position.

Thus utilising the invention, it is unnecessary to arrest movement of the printing apparatus as the printing apparatus moves across the lanes of articles, but at each registry position, it is only necessary to move the print head within the printing apparatus to the printing position. Thus the problems mentioned above with using an intermittent type of printer in this context are largely overcome.

Preferably the printing apparatus is mounted on a carriage and the method includes continuously moving the carriage, preferably at a generally constant speed, transversely across the lanes, relative to a base structure relative to which each of the articles of the set is held stationary during printing. All of the articles of the set may be positioned at the printing station simultaneously whilst the printing apparatus is moved transversely across all the lanes, or the articles may be conveyed severally, e.g. in turn, in their respective lanes, to the printing station, provided that the articles each are present at the printing station so that the printing apparatus may be moved into registry with the articles and printing performed, whilst the printing apparatus is continuously moved.

The printing apparatus may include a housing mounted on the carriage, and print head movement to and from the printing position may be relative to the housing of the printing apparatus.

The print head may be of the kind having a plurality of printing elements which are selectively actuated during printing by a control means to effect printing of desired information on each of the articles. The information printed may be the same for each of the articles, or different for at least one of the articles compared with the other articles.

In one embodiment the printing apparatus is a thermal printer in which there are printing elements arranged in a generally linear array along the print

head with the array extending generally transversely to the direction of movement of the printing apparatus across the lanes, the method including selectively energising the printing elements during printing to remove pixels of marking medium such as a thermal ink, from a carrier positioned between the printing elements and the article. Thus in moving the print head to the printing position, the printing elements are brought into a position in which the elements, when energised, are able to remove pixels of marking medium from the carrier, and when the print head is moved out of the printing position e.g. away from the article, the printing apparatus may be moved relative to the article with the printing elements out of contact with the carrier or at least with the carrier out of contact with any of the articles.

The method may include moving the carrier relative to the print head as the printing apparatus moves transversely of the lanes of articles during printing, so as that fresh carrier may continually be positioned between the print head and the article on which information is being printed. By "fresh" carrier we mean a new area of carrier from which pixels of marking medium to be moved during subsequent printing have not been removed in previous printing.

The printing apparatus may include a housing within which there is provided a storage spool for unused carrier, a take-up spool for used carrier, a first motive means to move at least the take-up spool to take up used carrier, and a second motive means to move the print head to and from the printing position.

In one arrangement, the method may include conveying the articles of the set in their parallel lanes to the printing station, arresting movement of the set of articles at the printing station while the information is printed on each of the articles of the set.

According to a second aspect of the invention we provide a method of printing information on each article of a set of articles arranged in generally

parallel lanes, at a printing station, the method including continuously moving a printing apparatus relative to the lanes to bring the printing apparatus into registry with each article of the set in turn, the printing apparatus including a print head and a carrier for marking medium which is applied to the articles during printing, and at each registry position, whilst continuing to move the printing apparatus, effecting printing with the print head, and when the information is printed, continuing to move the printing apparatus to the next registry position.

The invention may be applied to a thermal print head in which printing elements are selectively energised during printing to melt and remove pixels of marking medium from the carrier and deposit the pixels of ink on to the articles. Alternatively, the invention may be applied to an alternative kind of printer, such as an ink jet type printer in which the marking medium is contained in a reservoir and selectively applied by jetting, onto the articles to print the information.

The method of the second aspect of the invention may have any of the features of the method of the first aspect of the invention.

According to a third aspect of the invention we provide a printing station for performing the method of the first or second aspect of the invention, the printing station including a carriage, a printing apparatus, means to mount the printing apparatus on the carriage, means to move the carriage and thus the printing apparatus transversely of a plurality of lanes and to effect printing on each of a plurality of articles at the printing station, each of the articles being located in one of the lanes, characterised in that the means to move the carriage is adapted to move the carriage substantially continuously across the lanes and the printing apparatus being adapted to print the information on each of the articles of the set in turn without or substantially without stopping.

In one embodiment, the carriage may be mounted on a gantry which extends over or under the lanes and the printing apparatus is moved over or under the lanes respectively, on the carriage.

The gantry and/or the carriage may include a drive means for moving the carriage, as desired. Movement of the carriage may be controlled by a control means which co-ordinates printing with carriage movement.

The invention will now be described with reference to the accompanying drawings in which:-

FIGURE 1 is a side illustrative view of a printing station which may be operated in accordance with the invention, at the commencement of printing on each article of a set of articles;

FIGURE 2 is an illustrative plan view of the printing station of figure 1 but after printing.

Referring to the drawings, a printing station 10 is located adjacent a conveying means 12 e.g. of a packaging line, the conveying means 12 being arranged to convey sets of articles, two of which are shown at 14a to 14e and 15a to 15e, to and from i.e. past the printing station 10, with the articles arranged in generally parallel lanes a to e. Thus the articles of a set, e.g. articles 14a to 14e are, at the printing station 12, side by side. In this example, the articles 14a to 14e of the set all arrive at the printing station 10 together, although they may arrive severally, provided that each article 14a to 14e is present at the printing station 10 prior to a printing apparatus 16 being moved as hereinafter described, into registry with the articles, for printing.

In the example illustrated, the conveying means 12 is a belt or roller conveyor on which the articles 14a to 14e and 15a to 15e are moved relative to a base structure 21, but the invention may be utilised with other kinds of conveyor which are adapted to deliver a set of articles in lanes to a printing station 10.

As shown, the printing station 10 includes a gantry 18 mounted on the base structure 21 relative to which the conveying means 12 conveys the articles 14a to 14e and 15a to 15e, the gantry 18 having upstanding supports 19 at either side of the conveying means 12, and a generally horizontal rail part 20 although any other construction, e.g. a suspended construction, may be used to provide a rail or the like along which a carriage 22 carrying the printing apparatus 16 may be provided.

The carriage 22 is in this example suspended from the gantry rail part 20, but may be mounted on the rail part 20, or the rail part may be arranged to pass through the carriage 22 as desired. The carriage 22 has wheels or rollers 24 which ride on the rail part 20 to facilitate carriage 22 movement along the rail part 20. The carriage 22 in this example includes a drive means (not shown) which applies drive, through a suitable transmission (not shown) to the wheels or rollers 24 to effect carriage 22 movement along the rail part 20 transversely of the lanes a to e of articles 14a to 14e and 15a to 15e. In another embodiment, the carriage 22 may be driven by an external drive means, such as a motor connected by cables to the carriage 22, or by a lead screw with which a threaded member of the carriage 22 co-operates.

The requirement is for the carriage 22 to be moveable transversely of a set of articles 14a to 14e positioned at the printing station 10, preferably in a continuous or substantially continuous movement as hereinafter described.

The carriage 22 is fixed relative to the print apparatus 16, and the printing apparatus (16) includes a housing 25 in which is contained a print head 26 which in this example is a thermal print head 26 having a linear array 27 of thermal printing elements 28 each of which may selectively be energised under the control of a control means 30, such as computer, to remove pixels of marking medium such as a thermoplastic ink, from a carrier ribbon 31, as the print head 26 and ribbon 31 are relatively moved, and to deposit the ink onto an adjacent article.

The ribbon 31 is provided on a supply spool 32 mounted in the housing 25, and is wound on to a take-up spool 33 in use. In this example, the take-up spool 33 is driven from its own motive means 34 e.g. via a belt 35 or gear drive. In another example, the take -up spool may be driven from the drive means of the carriage 22.

The ribbon 31 is located between the print head 26 and an article 14a to 14b of the set of articles onto which information is to be printed, and the print head 26 is movable by a motive means (not shown) for movement towards and away from the articles 14a to 14e as indicated in figure 1 by the arrow A. When moved towards an article 14a to 14e, as seen in figure 1, to a printing position, the ribbon 31 is urged into contact with the article and as the printing elements 27 are selectively energised, the ink is melted and transferred from the ribbon 31 on to the article. When the print head 26 is moved away from the article out of the printing position, relative movement occurs between the print head 26 and the article 14a to 14e without any ink being removed from the ribbon and deposited on to an article, as the ribbon will be out of contact with the article, and typically out of contact with the print head 26 too.

The control means 30 in this example is connected to the printing apparatus 16, and to the drive means of the carriage 22 is desired, via a travelling lead 35, as is well known in the art, although the control means 30 or part of the control means may be mounted in or on the printing apparatus 16 or carriage 22 as desired.

A method in accordance with the invention will now be described.

A set of articles, 14a to 14e are conveyed by the conveying means 12 to the printing station 10, where they are held stationary. This may be achieved by the control means 30 co-ordinating article movement to stop the conveying means 12 when the articles 12a are in the positions shown in figure 1, or else some physical barrier may be moved into the path of the articles 14a to 14e to arrest further movement of the articles 14a to 14e.

The carriage 22 and printing apparatus 16 are then moved transversely of the lanes a to e of the articles 14a to 14e with the print head 26 moved out of the printing position. When the printing apparatus 16 has been moved to a position in registry with a first article 14a of the set of articles such that the print head 16 is positioned over a part of the article where it is desired to print information, the print head 26 is moved towards the article 14a into the printing position as seen in figure 1, with the ribbon 31 urged into contact with the article 14a between the print head 16 and the article 14a, while movement of the carriage 22 and printing apparatus 16 across the lanes a to e continues.

Printing of the information on the article 14a may then be commenced. The ribbon 31 will need to be moved by its motive means 34 relative to the print head 16 during printing. Such ribbon 31 movement may be at a speed such that the ribbon 31 and article 14a are or are not relatively moving, as desired to achieve a required quality of print. The printing elements 28 will selectively be energised as the carriage 22 and print head 16 continues to move transversely of the lanes a to e to print the desired information. When the information has been printed, the print head 16 is moved away from the article, again while print head 16 and carriage 22 movement transversely of the lanes a to e continues. Preferably ribbon 31 movement relative to the print head 16 is arrested so as not to waste ribbon 31.

The method is repeated as the printing apparatus 16 is moved into registry with a second 14b of the articles 14a to 14e, and then for each of the remaining articles 14c to 14e.

All the time, the printing apparatus 16 and carriage 22 continue to move transversely of the lanes a to e such that there is no requirement to stop the printing apparatus 16 until information has been printed on all of the articles 14a to 14e of the set.

When the printing apparatus 16 has printed on the last article 14e of the set, the conveying means 12 may be operated, or any physical barrier present

removed, to permit the articles 14a to 14e all to be conveyed in their lanes a to e beyond the printing station 10 as illustrated in figure 2, so that the next set of articles 15a to 15e may be conveyed to the printing station 10 for printing. If desired, as the next set of articles 15a to 15e are conveyed to the printing station 10, the printing apparatus 16 and carriage 22 may be moved back across the lanes a to e ready to print on the first article 15a of the next set, in the first lane a. Alternatively, the information may be printed on each of the next set of articles 15a to 15e in a reverse order as the printing apparatus 16 and carriage 22 are moved transversely of the lanes a to e in an opposite direction to the direction of movement of the printing apparatus 16 and carriage 22 during printing on the articles 14a to 14e of the previous set. In each case though, it is necessary to move the ribbon 31 relative to the print head 26 during printing so that fresh ribbon 31 from which pixels of ink have not already been removed, is continually presented between the print head 26 and the articles on which information is to be printed.

Various modifications in addition to those already mentioned may be made without departing from the scope of the invention. For example, as described the invention has been applied to a printing apparatus of the thermal kind, although may be applied to any other printing apparatus, such as an ink jet or other pixel based printing apparatus, as desired. Thus in such an alternative arrangement, a carrier ribbon for ink may not be required, but the ink may be contained in a carrier reservoir from which it is fed to printing elements or jets of the print head for jetting on to the articles during printing. The invention may be applied to other pixel based and non pixel based systems as desired.

Although in the drawings, a conveying means 12 for conveying a set of five articles is indicated, of course the set of articles may be any plurality of articles in a corresponding number of lanes.

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

## CLAIMS

1. A method of printing information on each article of a set of articles arranged in generally parallel lanes, at a printing station, the method including continuously moving a printing apparatus relative to the lanes to bring the printing apparatus into registry with each article of the set in turn, and at each registry position, whilst continuing to move the printing apparatus, moving a print head of the apparatus relative to the respective article to a printing position in which the print head is capable of printing information on the article, continuing to move the printing apparatus relative to the article whilst effecting printing with the print head, and when the information is printed, whilst continuing to move the printing apparatus, moving the print head out of the printing position.
2. A method according to claim 1 characterised in that the printing apparatus is mounted on a carriage and the method includes continuously moving the carriage transversely across the lanes, relative to a base structure relative to which each of the articles of the set is held stationary during printing.
3. A method according to claim 2 characterised in that the carriage is moved transversely of the lanes at a generally constant speed.
4. A method according to any one of the preceding claims characterised in that all of the articles of the set positioned at the printing station simultaneously whilst the printing apparatus is moved transversely across all the lanes.

5. A method according to any one of claims 1 to 3 characterised in that the articles are conveyed severally in their respective lanes, to the printing station, and are arranged to be present at the printing station so that the printing apparatus may be moved into registry with the articles and printing performed, whilst the printing apparatus is continuously moved.
6. A method according to any one of the preceding claims characterised in that the printing apparatus includes a housing mounted on the carriage, and print head movement to and from the printing position is relative to the housing of the printing apparatus.
7. A method according to any one of the preceding claims characterised in that the print head is of the kind having a plurality of printing elements which are selectively actuated during printing by a control means to effect printing of desired information on each of the articles.
8. A method according to any one of the preceding claims characterised in that the printing apparatus is a thermal printer in which there are printing elements arranged in a generally linear array along the print head with the array extending generally transversely to the direction of movement of the printing apparatus across the lanes, the method including selectively energising the printing elements during printing to remove pixels of marking medium from a carrier positioned between the printing elements and the article.
9. A method according to claim 8 characterised in that the method includes moving the carrier relative to the print head as the printing apparatus moves transversely of the lanes of articles during printing, so as that fresh carrier is continually be positioned between the print head and the article on which information is being printed.

10. A method according to claim 8 or claim 9 characterised in that the printing apparatus includes a housing within which there is provided a storage spool for unused carrier, a take-up spool for used carrier, a first motive means to move at least the take-up spool to take up used carrier, and a second motive means to move the print head to and from the printing position.

11. A method according to any one of the preceding claims which includes conveying the articles of the set in their parallel lanes to the printing station, arresting movement of the set of articles at the printing station while the information is printed on each of the articles of the set.

12. A method of printing information on each article of a set of articles arranged in generally parallel lanes, at a printing station, the method including continuously moving a printing apparatus relative to the lanes to bring the printing apparatus into registry with each article of the set in turn, the printing apparatus including a print head and a carrier for marking medium which is applied to the articles during printing, and at each registry position, whilst continuing to move the printing apparatus, effecting printing with the print head, and when the information is printed, continuing to move the printing apparatus to the next registry position.

13. A method according to claim 12 characterised in that the method is applied to printing apparatus having a thermal print head having printing elements which are selectively energised during printing to melt and remove pixels of marking medium from the carrier and deposit the pixels of ink on to the articles.

14. A method according to claim 12 characterised in that the method is applied to an ink jet type printer in which the marking medium is contained in a reservoir and selectively applied by jetting, onto the articles to print the information.
15. A method according to claim 12 or claim 13 characterised in that method includes any of the features of the method of claims 1 to 11.
16. A printing station for performing the method of any one of the preceding claims, the printing station including a carriage, a printing apparatus, means to mount the printing apparatus on the carriage, means to move the carriage and thus the printing apparatus transversely of a plurality of lanes and to effect printing on each of a plurality of articles at the printing station, each of the articles being located in one of the lanes, characterised in that the means to move the carriage is adapted to move the carriage substantially continuously across the lanes and the printing apparatus being adapted to print the information on each of the articles of the set in turn without or substantially without stopping.
17. A station according to claim 16 characterised in that the carriage is mounted on a gantry which extends over or under the lanes and the printing apparatus is moved over or under the lanes respectively, on the carriage.
18. A station according to claim 17 characterised in that the gantry and/or the carriage includes a drive means for moving the carriage.
19. A station according to claim 16 or claim 17 characterised in that movement of the carriage is controlled by a control means which co-ordinates printing with carriage movement.

20. A printing station substantially as hereinbefore described with reference to and as shown in that accompanying drawings.

21. Any novel feature of novel combination of features described herein and/or as shown in the accompanying drawings.

20030707 16:00:00

1 / 1

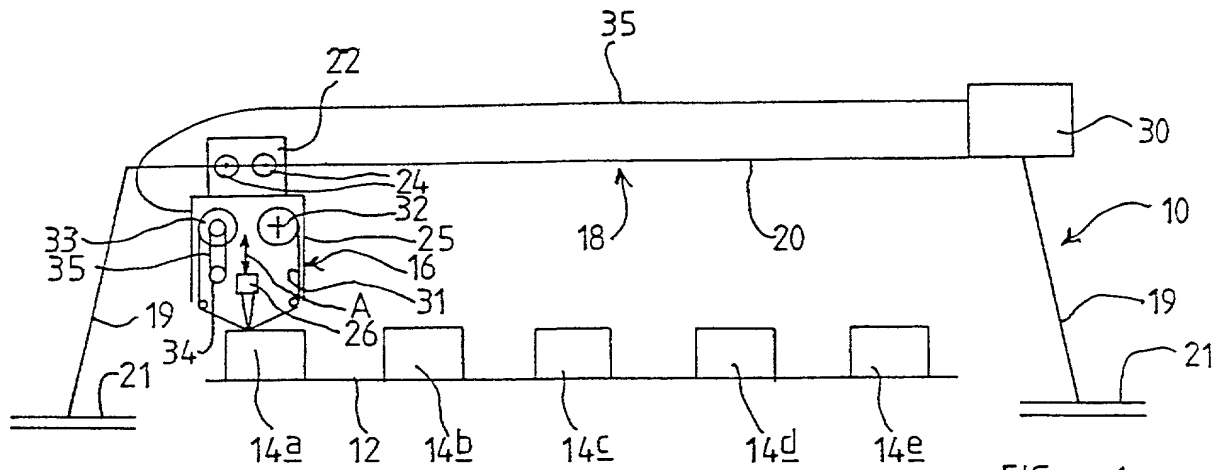


FIG 1

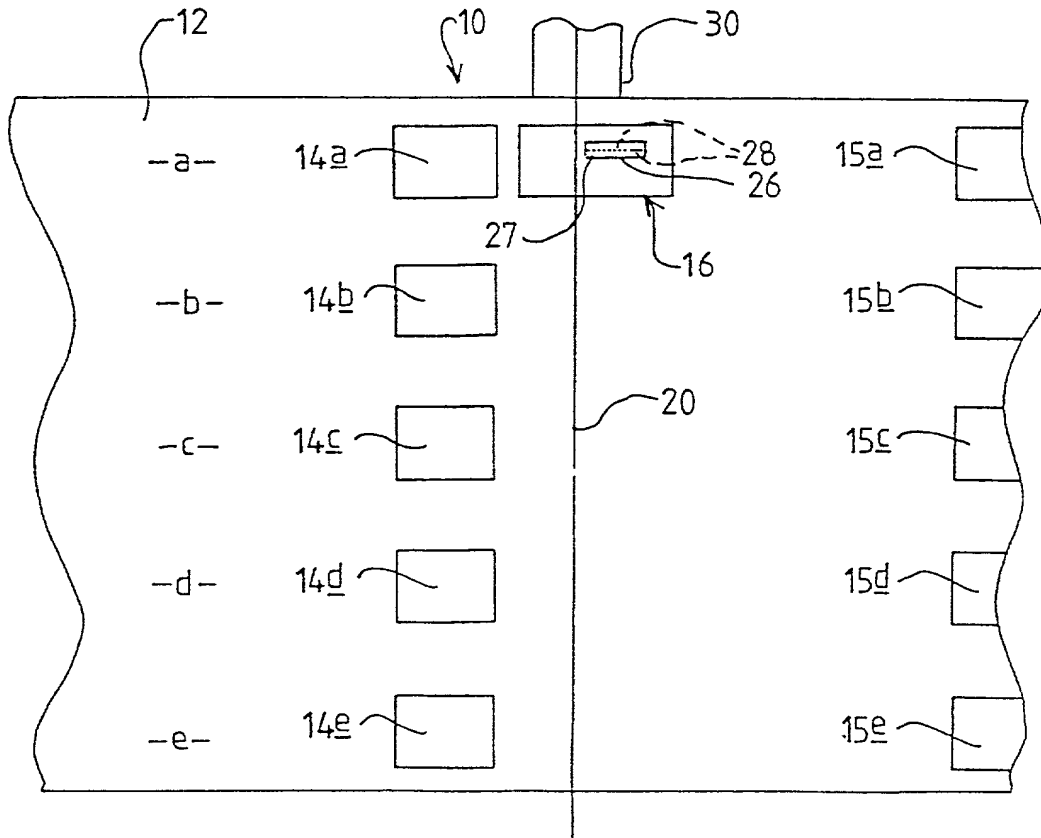


FIG 2

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD OF PRINTING, the specification of which:

[X] was described and claimed in PCT International Application No. PCT/GB00/03441 filed on September 7, 2000 and as amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
United Kingdom	9921081.7	September 8, 1999	[x] Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

John J. Gagel, Reg. No. 33,499  
Sean P. Daley, Reg. No. 40,978  
Christine P. Bellon, Reg. No. 41,611

Tu N. Nguyen, Reg. No. 42,934  
Robert C. Nabinger, Reg. No. 33,431

(4)

Address all telephone calls to JOHN J. GAGEL at telephone number (617) 521-7829.

Address all correspondence to JOHN J. GAGEL at:

FISH & RICHARDSON P.C.  
225 Franklin Street  
Boston, MA 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

## Combined Declaration and Power of Attorney

Page 2 of 2 Pages

Full Name of Inventor: ALAN COULL

**Inventor's Signature:**

Alan Coie

Date: 21<sup>st</sup> MAY 2001

Residence Address:

Nottingham, United Kingdom

**Citizenship:**

United Kingdom

Post Office Address:

16 Melrose Avenue, Beeston, Nottingham NG9 1HW, United Kingdom

20257771.doc

Parameter	Unit	Value	Standard Error	t-Statistic	p-Value
Intercept		0.0000	0.0000	0.0000	0.0000
Age	Years	0.0000	0.0000	0.0000	0.0000
Age squared	Years squared	0.0000	0.0000	0.0000	0.0000
Age cubed	Years cubed	0.0000	0.0000	0.0000	0.0000
Age quart	Years quart	0.0000	0.0000	0.0000	0.0000
Age quint	Years quint	0.0000	0.0000	0.0000	0.0000
Age sext	Years sext	0.0000	0.0000	0.0000	0.0000
Age sept	Years sept	0.0000	0.0000	0.0000	0.0000
Age oct	Years oct	0.0000	0.0000	0.0000	0.0000
Age non	Years non	0.0000	0.0000	0.0000	0.0000
Age dec	Years dec	0.0000	0.0000	0.0000	0.0000
Age ele	Years ele	0.0000	0.0000	0.0000	0.0000
Age twel	Years twel	0.0000	0.0000	0.0000	0.0000
Age thir	Years thir	0.0000	0.0000	0.0000	0.0000
Age four	Years four	0.0000	0.0000	0.0000	0.0000
Age fiv	Years fiv	0.0000	0.0000	0.0000	0.0000
Age six	Years six	0.0000	0.0000	0.0000	0.0000
Age sev	Years sev	0.0000	0.0000	0.0000	0.0000
Age eigh	Years eigh	0.0000	0.0000	0.0000	0.0000
Age nine	Years nine	0.0000	0.0000	0.0000	0.0000
Age ten	Years ten	0.0000	0.0000	0.0000	0.0000
Age elev	Years elev	0.0000	0.0000	0.0000	0.0000
Age twel	Years twel	0.0000	0.0000	0.0000	0.0000
Age thir	Years thir	0.0000	0.0000	0.0000	0.0000
Age four	Years four	0.0000	0.0000	0.0000	0.0000
Age fiv	Years fiv	0.0000	0.0000	0.0000	0.0000
Age six	Years six	0.0000	0.0000	0.0000	0.0000
Age sev	Years sev	0.0000	0.0000	0.0000	0.0000
Age eigh	Years eigh	0.0000	0.0000	0.0000	0.0000
Age nine	Years nine	0.0000	0.0000	0.0000	0.0000
Age ten	Years ten	0.0000	0.0000	0.0000	0.0000
Age elev	Years elev	0.0000	0.0000	0.0000	0.0000
Age twel	Years twel	0.0000	0.0000	0.0000	0.0000
Age thir	Years thir	0.0000	0.0000	0.0000	0.0000
Age four	Years four	0.0000	0.0000	0.0000	0.0000
Age fiv	Years fiv	0.0000	0.0000	0.0000	0.0000
Age six	Years six	0.0000	0.0000	0.0000	0.0000
Age sev	Years sev	0.0000	0.0000	0.0000	0.0000
Age eigh	Years eigh	0.0000	0.0000	0.0000	0.0000
Age nine	Years nine	0.0000	0.0000	0.0000	0.0000
Age ten	Years ten	0.0000	0.0000	0.0000	0.0000
Age elev	Years elev	0.0000	0.0000	0.0000	0.0000
Age twel	Years twel	0.0000	0.0000	0.0000	0.0000
Age thir	Years thir	0.0000	0.0000	0.0000	0.0000
Age four	Years four	0.0000	0.0000	0.0000	0.0000
Age fiv	Years fiv	0.0000	0.0000	0.0000	0.0000
Age six	Years six	0.0000	0.0000	0.0000	0.0000
Age sev	Years sev	0.0000	0.0000	0.0000	0.0000
Age eigh	Years eigh	0.0000	0.0000	0.0000	0.0000
Age nine	Years nine	0.0000	0.0000	0.0000	0.0000
Age ten	Years ten	0.0000	0.0000	0.0000	0.0000
Age elev	Years elev	0.0000	0.0000	0.0000	0.0000
Age twel	Years twel	0.0000	0.0000	0.0000	0.0000
Age thir	Years thir	0.0000	0.0000	0.0000	0.0000
Age four	Years four	0.0000	0.0000	0.0000	0.0000
Age fiv	Years fiv	0.0000	0.0000	0.0000	0.0000
Age six	Years six				